

Berker Q.1 / Q.3

Quality always comes at a price, but the Berker Q.1 and Q.3 are noteworthy exceptions. They also excel through an unusually attractive price performance ratio.


- The quality of design can be seen in the fact that the centre plates and at the upper edge of the frame, creating a flat contour



Frames / Covers / Central inserts

Plastic, velvety	
white	similar to RAL 1013
polar white	similar to RAL 9010
anthracite	similar to RAL 7021
red	similar to RAL 3003
green	similar to RAL 6029
orange	similar to RAL 2003

Schuko socket outlets	194
Flush-mounted safety devices	201
International socket outlet systems	202
Covers for switches/push-buttons	206
Berker.Net - Conventional electronics platform	211
Covers for dimmers	213
Covers for blind switches/push-buttons	213
Communication/multimedia technology	215
Pilot lamps	221
Supplementary products	222
Hotel applications	223
Accessible construction	224
Hospital installation	226

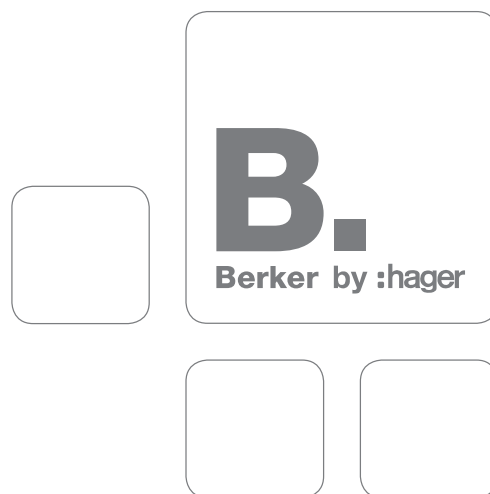


Q.1/Q.3
Built-in elements

SCHUKO socket outlets

- Socket outlets with enhanced contact protection (child protection) according to IEC 60884-1
- Connection terminals according to IEC 60884-1


New **SCHUKO socket outlet** **i** 474

Rated voltage 250 V~ - with plug-in terminals
Rated current 16 A




Design Order no. PU

white velvety	* 4743 60 82	10
polar white velvety	4743 60 89	10
anthracite velvety, lacquered	4743 60 86	10




New **SCHUKO socket outlet** **i** 474

- enhanced contact protection - with plug-in terminals




Rated voltage 250 V~
Rated current 16 A




Design Order no. PU

white velvety	* 4723 60 82	10
polar white velvety	4723 60 89	10
anthracite velvety, lacquered	4723 60 86	10




New **SCHUKO socket outlet** **i** 474

- screw-in lift terminals - with screw-in lift terminals




Rated voltage 250 V~
Rated current 16 A
Insertion depth 32 mm




Design Order no. PU

white velvety	* 4143 60 82	10
polar white velvety	4143 60 89	10
anthracite velvety, lacquered	4143 60 86	10





New **SCHUKO socket outlet** **i** 474

- enhanced contact protection - with screw-in lift terminals
- screw-in lift terminals




Rated voltage 250 V~
Rated current 16 A

Design Order no. PU



white velvety	* 4123 60 82	10
polar white velvety	4123 60 89	10
anthracite velvety, lacquered	4123 60 86	10



New **SCHUKO socket outlet 45°** **i** 474

Rated voltage 250 V~ – for diagonal installation
Rated current 16 A – with plug-in terminals



Specially suited to combinations of several socket outlets if right angle plugs are used.

Design	Order no.	PU
white velvety	★ 4727 60 82	10
polar white velvety	4727 60 89	10
anthracite velvety, lacquered	4727 60 86	10


New **SCHUKO socket outlet** **i** 474

- labelling field – with plug-in terminals

Rated voltage 250 V~
Rated current 16 A



Labelling field height arranged for P-touch strips 6 mm.



Design	Order no.	PU
white velvety	★ 4750 60 82	10
polar white velvety	4750 60 89	10
anthracite velvety, lacquered	4750 60 86	10



New **SCHUKO socket outlet** **i** 474

- labelling field – with plug-in terminals
- enhanced contact protection

Rated voltage 250 V~
Rated current 16 A



Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
white velvety	★ 4749 60 82	10
polar white velvety	4749 60 89	10
anthracite velvety, lacquered	4749 60 86	10




New **SCHUKO socket outlet** **i** 474

- labelling field – with screw-in lift terminals
- enhanced contact protection
- screw-in lift terminals

Rated voltage 250 V~
Rated current 16 A
Insertion depth 32 mm


Labelling field height arranged for P-touch strips 6 mm.






Design	Order no.	PU
white velvety	★ 4149 60 82	10
polar white velvety	4149 60 89	10
anthracite velvety, lacquered	4149 60 86	10

New **SCHUKO socket outlet with LED orientation light** **i** 474

- enhanced contact protection
- screw-in lift terminals






Rated voltage	250 V~
Frequency	50/60 Hz
Rated current	16 A
Power consumption	0.25 W/0.35 VA
Light intensity (white)	0.2 cd
Switch-on brightness	ca. 2 lx
Switch-off brightness	ca. 4 lx
Conductor cross-section (rigid)	max. 2.5 mm ²


Caution!
Items with special flush-mounted insert.
Centre plates with LED orientation lights are not compatible with the standard socket outlets.


Design	Order no.	PU
white velvety	* 4109 60 82	10
polar white velvety	4109 60 89	10
anthracite velvety, lacquered	4109 60 86	10



New **SCHUKO socket outlet with control LED** **i** 474

- labelling field
- enhanced contact protection
- screw-in lift terminals






Rated voltage	250 V~
Rated current	16 A


Labelling field height arranged for P-touch strips 6 mm.


Design	Order no.	PU
white velvety	* 4110 60 82	10
polar white velvety	4110 60 89	10
anthracite velvety, lacquered	4110 60 86	10



New **Double SCHUKO socket outlet with cover plate** **i** 474

- enhanced contact protection
- with plug-in terminals






Rated voltage	250 V~
Rated current	16 A
Assembling height	22 mm

For installation in 1gang wall boxes according to DIN 49073-1

Design	Order no.	PU
white velvety	* 4729 60 82	10
polar white velvety	4729 60 89	10
anthracite velvety, lacquered	4729 60 86	10



	<p>Combination SCHUKO socket outlet 2gang with frame</p> <p>Rated voltage 250 V~ Rated current 16 A</p> <p>For installation in cable duct wall boxes and in standard, commercially-available 2gang hollow wall boxes, also in 2gang flush-mounted boxes.</p> <p>Design Order no. PU</p> <p>Berker Q.1</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;">white velvety</td> <td style="width: 20%; text-align: right;">★ 4720 60 82</td> <td style="width: 20%; text-align: right;">5</td> </tr> <tr> <td>polar white velvety</td> <td style="text-align: right;">4720 60 89</td> <td style="text-align: right;">5</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td style="text-align: right;">4720 60 86</td> <td style="text-align: right;">5</td> </tr> </table>	white velvety	★ 4720 60 82	5	polar white velvety	4720 60 89	5	anthracite velvety, lacquered	4720 60 86	5	<p>i 474</p> <p>– without spreader claws – with plug-in terminals – 2 x 1gang, wired-through</p>
white velvety	★ 4720 60 82	5									
polar white velvety	4720 60 89	5									
anthracite velvety, lacquered	4720 60 86	5									

SCHUKO socket outlets with hinged cover

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

	<p>SCHUKO socket outlet with hinged cover</p> <p>Rated voltage 250 V~ Rated current 16 A</p> <p>Design Order no. PU</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;">white velvety</td> <td style="width: 20%; text-align: right;">★ 4751 60 62</td> <td style="width: 20%; text-align: right;">10</td> </tr> <tr> <td>polar white velvety</td> <td style="text-align: right;">4751 60 69</td> <td style="text-align: right;">10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td style="text-align: right;">4751 60 66</td> <td style="text-align: right;">10</td> </tr> </table>	white velvety	★ 4751 60 62	10	polar white velvety	4751 60 69	10	anthracite velvety, lacquered	4751 60 66	10	<p>i 474</p> <p>– with hinged cover that falls back – with imprint – with plug-in terminals</p>
white velvety	★ 4751 60 62	10									
polar white velvety	4751 60 69	10									
anthracite velvety, lacquered	4751 60 66	10									


	<p>SCHUKO socket outlet with hinged cover</p> <p>– enhanced contact protection</p> <p> Rated voltage 250 V~ Rated current 16 A</p> <p>Design Order no. PU</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;">white velvety</td> <td style="width: 20%; text-align: right;">★ 4751 60 72</td> <td style="width: 20%; text-align: right;">10</td> </tr> <tr> <td>polar white velvety</td> <td style="text-align: right;">4751 60 79</td> <td style="text-align: right;">10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td style="text-align: right;">4751 60 76</td> <td style="text-align: right;">10</td> </tr> </table>	white velvety	★ 4751 60 72	10	polar white velvety	4751 60 79	10	anthracite velvety, lacquered	4751 60 76	10	<p>i 474</p> <p>– with hinged cover that falls back – with imprint – with plug-in terminals</p>
white velvety	★ 4751 60 72	10									
polar white velvety	4751 60 79	10									
anthracite velvety, lacquered	4751 60 76	10									

	<p>SCHUKO socket outlet with hinged cover</p> <p>– enhanced contact protection</p> <p> Rated voltage 250 V~ Rated current 16 A</p> <p>Design Order no. PU</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;">white velvety</td> <td style="width: 20%; text-align: right;">★ 4751 60 82</td> <td style="width: 20%; text-align: right;">10</td> </tr> <tr> <td>polar white velvety</td> <td style="text-align: right;">4751 60 89</td> <td style="text-align: right;">10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td style="text-align: right;">4751 60 86</td> <td style="text-align: right;">10</td> </tr> </table>	white velvety	★ 4751 60 82	10	polar white velvety	4751 60 89	10	anthracite velvety, lacquered	4751 60 86	10	<p>i 474</p> <p>– with self-closing hinged covers – with imprint – with plug-in terminals</p> <table border="0" style="width: 100%; margin-top: 10px;"> <tr> <td style="width: 40%;">Suitable for optional</td> <td style="width: 20%;">Order no.</td> <td style="width: 40%;">Page</td> </tr> <tr> <td>Sealing set for socket outlets/centre plates</td> <td>1010 72 00</td> <td>223</td> </tr> </table>	Suitable for optional	Order no.	Page	Sealing set for socket outlets/centre plates	1010 72 00	223
white velvety	★ 4751 60 82	10															
polar white velvety	4751 60 89	10															
anthracite velvety, lacquered	4751 60 86	10															
Suitable for optional	Order no.	Page															
Sealing set for socket outlets/centre plates	1010 72 00	223															

Q.1/Q.3
Built-in elements

New **SCHUKO socket outlet with hinged cover** **i** 474

- enhanced contact protection
- installation position variable in 45° steps



Rated voltage 250 V~

Rated current 16 A

Specially suited to combinations of several socket outlets if right angle plugs are used.


Design	Order no.	PU
white velvety	* 4744 60 82	10
polar white velvety	4744 60 89	10
anthracite velvety, lacquered	4744 60 86	10

– with hinged cover that falls back

– with imprint


– mounting orientation of insert selectable in 45° steps

– with plug-in terminals



SCHUKO socket outlet with hinged cover **i** 474

- labelling field
- enhanced contact protection
- installation position variable in 45° steps



Rated voltage 250 V~

Rated current 16 A

Specially suited to combinations of several socket outlets if right angle plugs are used.

Labelling field height designed for 6 mm P-touch strips.


Design	Order no.	PU
polar white velvety	4746 60 89	10
anthracite velvety, lacquered	4746 60 86	10

– with hinged cover that falls back

– with imprint


– mounting orientation of insert selectable in 45° steps

– with plug-in terminals



New **SCHUKO socket outlet with hinged cover** **i** 474

- labelling field
- enhanced contact protection



Rated voltage 250 V~

Rated current 16 A

Labelling field height arranged for P-touch strips 6 mm.


Design	Order no.	PU
white velvety	* 4752 60 82	10
polar white velvety	4752 60 89	10
anthracite velvety, lacquered	4752 60 86	10

– with self-closing hinged covers

– with imprint

– with plug-in terminals

Suitable for optional	Order no.	Page
Sealing set for socket outlets/centre plates	1010 72 00	223



SCHUKO socket outlets for special applications

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

SCHUKO socket outlet **i** 474


Rated voltage 250 V~


Rated current 16 A

Insert colour-coded.

– with plug-in terminals

Design	Order no.	PU
red velvety	4743 60 12	10
green velvety	4743 60 13	10
orange velvety	4743 60 14	10





SCHUKO socket outlet

- screw-in lift terminals

- with screw-in lift terminals

i 474



Rated voltage	250 V~
Rated current	16 A
Insertion depth	32 mm

Insert colour-coded.

Design	Order no.	PU
red velvety	4143 60 12	10
green velvety	4143 60 13	10
orange velvety	4143 60 14	10



SCHUKO socket outlet with imprint

Rated voltage	250 V~	- with plug-in terminals
Rated current	16 A	

i 474

Insert colour-coded.

Labelling field height designed for 6 mm P-touch strips.

Design	Order no.	PU
polar white velvety, imprint "EDV" in black	4743 60 09	10
polar white velvety, imprint "EDV" in red	4743 60 79	10
polar white velvety, imprint "SV" in green	4743 60 39	10
polar white velvety, imprint "ZSV" in orange	4743 60 49	10



SCHUKO socket outlet with imprint

Rated voltage	250 V~	- with plug-in terminals
Rated current	16 A	

i 474

Insert colour-coded.

Labelling field height designed for 6 mm P-touch strips.

Design	Order no.	PU
red velvety, imprint "EDV"	4743 60 22	10
green velvety, imprint "SV"	4743 60 03	10
orange velvety, imprint "ZSV"	4743 60 07	10



SCHUKO socket outlet

- labelling field

- with plug-in terminals

i 474



Rated voltage	250 V~
Rated current	16 A

Insert colour-coded.

Labelling field height designed for 6 mm P-touch strips.

Design	Order no.	PU
red velvety	4750 60 02	10
green velvety	4750 60 03	10
orange velvety	4750 60 07	10





SCHUKO socket outlet with imprint

i 474

- labelling field
- with plug-in terminals



Rated voltage 250 V~
Rated current 16 A

Insert colour-coded.
Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
red velvety, imprint "EDV"	4750 60 15	10
green velvety, imprint "SV"	4750 60 13	10
orange velvety, imprint "ZSV"	4750 60 14	10



SCHUKO socket outlet with control LED and imprint

i 474

- labelling field
- enhanced contact protection
- screw-in lift terminals
- with screw-in lift terminals



Rated voltage 250 V~
Rated current 16 A

Insert colour-coded.
Labelling field height arranged for P-touch strips 6 mm.
Execution SV, ZSV according to VDE 0100-710

Design	Order no.	PU
red velvety, imprint "EDV"	4110 60 15	10
green velvety, imprint "SV"	4110 60 13	10
orange velvety, imprint "ZSV"	4110 60 14	10



SCHUKO socket outlet with hinged cover and imprint

i 474

- with hinged cover that falls back
- with plug-in terminals

Rated voltage 250 V~
Rated current 16 A

Design	Order no.	PU
polar white velvety, imprint "EDV" in red	4751 60 59	10
polar white velvety, imprint "SV" in green	4751 60 39	10
polar white velvety, imprint "ZSV" in orange	4751 60 49	10



SCHUKO socket outlet with hinged cover and imprint

i 474

- labelling field
- enhanced contact protection
- with self-closing hinged covers
- with plug-in terminals



Rated voltage 250 V~
Rated current 16 A

Labelling field height arranged for P-touch strips 6 mm.

Suitable for optional	Order no.	Page
Sealing set for socket outlets/centre plates	1010 72 00	223

Design	Order no.	PU
polar white velvety, imprint "EDV" in red	4752 60 59	10
polar white velvety, imprint "SV" in green	4752 60 39	10
polar white velvety, imprint "ZSV" in orange	4752 60 49	10



Flush-mounted safety devices

SCHUKO socket outlets with safety device



SCHUKO socket outlet with overvoltage protection

i 476

- labelling field
- screw terminals



- with imprint
- with indicator LED for "on/error"
- with screw terminals
- with acoustic fault signal

Rated voltage	250 V~
Frequency	50/60 Hz
Rated current	16 A
Insertion depth	32 mm

Labelling field height arranged for P-touch strips 6 mm.
Connection terminals according to IEC 60884-1
Overvoltage protection according to EN 61643 and VDE 0675-6-11

Design	Order no.	PU
polar white velvety	4108 60 89	1
anthracite velvety, lacquered	4108 60 86	1
red velvety	4108 60 62	1



New

SCHUKO socket outlet with residual current circuit-breaker

i 475

- enhanced contact protection



- with spreader claws
- type A for alternating currents and pulsating direct currents
- with plug-in terminals
- to protect connected and downstream loads


Rated voltage	250 V~
Frequency	50/60 Hz
Rated current	16 A
Measurement error current	30 mA
Surge current resistance	250 A (8/20) μ s
Short-circuit resistance (with back-up fuse 20 AgL)	3 kA
Trigger time	\leq 30 ms

Through-wired socket outlets are also protected.
For use in old installations with provision made to safeguard existing standards without additional protective regulations
Connection terminals according to IEC 60884-1
Tested conform VDE 0664 (EN 61008)

Design	Order no.	PU
white velvety	* 4708 60 82	1
polar white velvety	4708 60 89	1
anthracite velvety, lacquered	4708 60 86	1



Covers for protection switch



New

50 x 50 mm centre plate for RCD protection switch

Caution!
Use only with adapter ring for centre plate 50 x 50 mm from the corresponding range.



Suitable for Residual current circuit-breaker	Order no. 2844	Page 437
---	--------------------------	--------------------



Design	Order no.	PU
white velvety	* 1493 19 02	1
polar white matt/velvety	1493 19 09	1



International socket outlet systems

- Socket outlets with enhanced contact protection (child protection) according to IEC 60884-1
- Connection terminals according to IEC 60884-1



Socket outlets without earthing contact

<p>New</p>  	<p>Socket outlet without earthing contact</p> <p>Rated voltage 250 V~ Rated current 16 A</p> <ul style="list-style-type: none"> - without spreader claws - 2pole - with plug-in terminals 	<p>i 474</p>												
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 61 6703 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>61 6703 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>61 6703 60 86</td> <td>10</td> </tr> </table>	Design	Order no.	PU	white velvety	* 61 6703 60 82	10	polar white velvety	61 6703 60 89	10	anthracite velvety, lacquered	61 6703 60 86	10		
Design	Order no.	PU												
white velvety	* 61 6703 60 82	10												
polar white velvety	61 6703 60 89	10												
anthracite velvety, lacquered	61 6703 60 86	10												

 	<p>Socket outlet without earthing contact</p> <ul style="list-style-type: none"> - enhanced contact protection - without spreader claws - 2pole - with plug-in terminals <p>Rated voltage 250 V~ Rated current 16 A</p>	<p>i 474</p>									
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>polar white velvety</td> <td>61 6733 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>61 6733 60 86</td> <td>10</td> </tr> </table>	Design	Order no.	PU	polar white velvety	61 6733 60 89	10	anthracite velvety, lacquered	61 6733 60 86	10		
Design	Order no.	PU									
polar white velvety	61 6733 60 89	10									
anthracite velvety, lacquered	61 6733 60 86	10									

<p>New</p>  	<p>Socket outlet without earthing contact</p> <ul style="list-style-type: none"> - screw terminals - 2pole - with screw terminals <p>Rated voltage 250 V~ Rated current 16 A</p>	<p>i 474</p>												
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 61 6103 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>61 6103 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>61 6103 60 86</td> <td>10</td> </tr> </table>	Design	Order no.	PU	white velvety	* 61 6103 60 82	10	polar white velvety	61 6103 60 89	10	anthracite velvety, lacquered	61 6103 60 86	10		
Design	Order no.	PU												
white velvety	* 61 6103 60 82	10												
polar white velvety	61 6103 60 89	10												
anthracite velvety, lacquered	61 6103 60 86	10												


Socket outlets with earthing pin

<p>New</p>  	<p>Socket outlet with earthing pin</p> <ul style="list-style-type: none"> - enhanced contact protection - 2pole + earth - with plug-in terminals <p>Rated voltage 250 V~ Rated current 16 A</p>	<p>i 474</p>												
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 67 6876 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>67 6876 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>67 6876 60 86</td> <td>10</td> </tr> </table>	Design	Order no.	PU	white velvety	* 67 6876 60 82	10	polar white velvety	67 6876 60 89	10	anthracite velvety, lacquered	67 6876 60 86	10		
Design	Order no.	PU												
white velvety	* 67 6876 60 82	10												
polar white velvety	67 6876 60 89	10												
anthracite velvety, lacquered	67 6876 60 86	10												

New

Socket outlet with earthing pin **i** 474



- enhanced contact protection
- screw-in lift terminals




Rated voltage 250 V~

Rated current 16 A

- 2pole + earth
- with screw-in lift terminals


Design	Order no.	PU
white velvety	★ 67 6576 60 82	10
polar white velvety	67 6576 60 89	10
anthracite velvety, lacquered	67 6576 60 86	10



New

Socket outlet with earthing pin and LED orientation light **i** 474

- enhanced contact protection
- screw-in lift terminals



Rated voltage 250 V~

Frequency 50/60 Hz

Rated current 16 A

Power consumption 0.25 W/0.35 VA

Light intensity (white) 0.2 cd



Switch-on brightness ca. 2 lx

Switch-off brightness ca. 4 lx


Conductor cross-section (rigid) max. 2.5 mm²

- additional benefit by combination of a socket outlet with an orientation light
- 2pole + earth
- integrated brightness sensor that switches the orientation light on at twilight and off when there is sufficient brightness
- with screw-in lift terminals
- long service life of the LED
- white LED light
- through-wiring possible, therefore also ideal for retrofitting

Caution!
Items with special flush-mounted insert.
Centre plates with LED orientation lights are not compatible with the standard socket outlets.


Design	Order no.	PU
white velvety	★ 67 6510 60 82	10
polar white velvety	67 6510 60 89	10
anthracite velvety, lacquered	67 6510 60 86	10



New

Socket outlet with earth contact pin and monitoring LED **i** 474



- enhanced contact protection
- screw-in lift terminals




Rated voltage 250 V~

Rated current 16 A

- 2pole + earth
- with screw-in lift terminals

Design	Order no.	PU
white velvety	★ 67 6509 60 82	10
polar white velvety	67 6509 60 89	10
anthracite velvety	67 6509 60 86	10





New

Socket outlet with earthing pin and hinged cover **i** 474


- enhanced contact protection
- with hinged cover that falls back
- with imprint
- 2pole + earth
- with plug-in terminals

Rated voltage 250 V~
Rated current 16 A

Design Order no. PU

white velvety	* 67 6877 60 82	10
polar white velvety	67 6877 60 89	10
anthracite velvety, lacquered	67 6877 60 86	10






New

Socket outlet with earthing pin and hinged cover **i** 474


- enhanced contact protection
- screw-in lift terminals
- with hinged cover that falls back
- with imprint
- 2pole + earth
- with screw-in lift terminals

Rated voltage 250 V~
Rated current 16 A

Design Order no. PU

white velvety	* 67 6583 60 82	10
polar white velvety	67 6583 60 89	10
anthracite velvety, lacquered	67 6583 60 86	10





Socket outlets with earthing pin for special applications

Socket outlet with earthing pin **i** 474


- enhanced contact protection
- 2pole + earth
- with plug-in terminals

Rated voltage 250 V~
Rated current 16 A

Design Order no. PU




red velvety	67 6876 60 12	10
green velvety	67 6876 60 13	10
orange velvety	67 6876 60 14	10



Socket outlet with earthing pin **i** 474


- enhanced contact protection
- screw-in lift terminals
- 2pole + earth
- with screw-in lift terminals

Rated voltage 250 V~
Rated current 16 A

Design Order no. PU

red velvety	67 6576 60 12	10
green velvety	67 6576 60 13	10
orange velvety	67 6576 60 14	10





Socket outlet with earth contact pin and monitoring LED

i 474

- enhanced contact protection
- screw-in lift terminals

- 2pole + earth
- with screw-in lift terminals



Rated voltage 250 V~
Rated current 16 A

Design	Order no.	PU
red velvety	67 6509 60 15	10
green velvety	67 6509 60 13	10
orange velvety	67 6509 60 14	10



BRITISH STANDARD socket outlets



Socket outlet insert with earthing contact BRITISH STANDARD, can be switched off

i 474

- enhanced contact protection
- screw terminals

- without spreader claws
- 2pole + earth
- with screw terminals



Rated voltage 250 V~
Rated current 13 A

Suitable for
Centre plate for socket outlets,
British Standard, can be switched off

Order no. **Page**
page 205

Design	Order no.	PU
white glossy	5342 02 12	10
polar white glossy	5342 02 19	10
anthracite matt	5342 02 16	10



New



Centre plate for socket outlets, British Standard, can be switched off

Design	Order no.	PU
white velvety	* 33 1307 60 82	10
polar white velvety	33 1307 60 89	10
anthracite velvety	33 1307 60 86	10

NEMA-socket outlets

New



Socket outlet with earthing contact USA/CANADA NEMA 5-15 R

i 474

- screw terminals

- without spreader claws
- 2pole + earth
- with screw terminals




Rated voltage 125 V~
Rated current 15 A

Not UL-certified.
Standard NEMA 5-15 R

Design	Order no.	PU
white velvety	* 4166 60 82	10
polar white velvety	4166 60 89	10
anthracite velvety, lacquered	4166 60 86	10



Q.1/Q.3
Built-in elements



New

**Socket outlet with earthing contact USA/CANADA
NEMA 5-20 R**

i 474

- screw terminals



- without spreader claws
- 2pole + earth
- with screw terminals

Rated voltage 125 V~
Rated current 20 A

Not UL-certified.
Standard NEMA 5-20 R



Design	Order no.	PU
white velvety	* 4168 60 82	10
polar white velvety	4168 60 89	10
anthracite velvety, lacquered	4168 60 86	10

Covers for switches/push-buttons

Rockers

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 71 00.



New



Rocker

- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	* 1620 60 82	10
polar white velvety	1620 60 89	10
anthracite velvety, lacquered	1620 60 86	10



New




Rocker with imprinted symbol for light

- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	* 1620 60 42	10
polar white velvety	1620 60 49	10
anthracite velvety, lacquered	1620 60 46	10



New



Rocker with imprinted symbol for bell

- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	223


Design	Order no.	PU
white velvety	* 1620 60 52	10
polar white velvety	1620 60 59	10
anthracite velvety, lacquered	1620 60 56	10



Rocker with imprinted symbol for door opener

– also for KNX applications: push-button, 1gang, and group push-button, 1gang

Design	Order no.	Page
white velvety	* 1620 60 62	10
polar white velvety	1620 60 69	10
anthracite velvety, lacquered	1620 60 66	10



Rocker

– labelling field




For labelling with names, notes etc.

Labelling field height designed for 6 mm P-touch strip.

– also for KNX applications: push-button, 1gang, and group push-button, 1gang

Design	Order no.	Page
white velvety	* 1626 60 82	10
polar white velvety	1626 60 89	10
anthracite velvety, lacquered	1626 60 86	10



Rocker


– lens



Lenses available in orange and clear. The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

– for illumination and monitoring circuit
– also for KNX applications: push-button, 1gang, and group push-button, 1gang

Design	Order no.	Page
white velvety	* 1621 60 82	10
polar white velvety	1621 60 89	10
anthracite velvety, lacquered	1621 60 86	10



Rocker with imprinted symbol for light


– lens



Lenses available in orange and clear. The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

– for illumination and monitoring circuit
– also for KNX applications: push-button, 1gang, and group push-button, 1gang

Design	Order no.	Page
white velvety	* 1621 60 72	10
polar white velvety	1621 60 79	10
anthracite velvety, lacquered	1621 60 76	10



Rocker

- labelling field
- lens



Lenses available in orange and clear.
For labelling with names, notes etc.


Labelling field height designed for 6 mm P-touch strip.

The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

- for illumination and monitoring circuit
- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	* 1628 60 82	10
polar white velvety	1628 60 89	10
anthracite velvety, lacquered	1628 60 86	10



Rocker with imprinted symbol for bell

- labelling field
- lens



Lenses available in orange and clear.
For labelling with names, notes etc.

Labelling field height designed for 6 mm P-touch strip.

The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

- for illumination and monitoring circuit
- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Design	Order no.	PU
white velvety	* 1628 60 72	10
polar white velvety	1628 60 79	10
anthracite velvety, lacquered	1628 60 76	10



Rocker

- large labelling field
- lens



Labelling field (W x H) ≈ 54,8 x 42,8 mm

Lenses available in orange and clear.
For labelling with names, notes etc.

Labelling field height designed for two 18 mm P-touch strips.

The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

- for illumination and monitoring circuit
- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	* 1696 60 82	10
polar white velvety	1696 60 89	10
anthracite velvety, lacquered	1696 60 86	10



Rocker with imprinted symbol for bell

- large labelling field
- lens



Labelling field (W x H) ≈ 54.8 x 42.8 mm

Lenses available in orange and clear.
For labelling with names, notes etc.

Labelling field height designed for two 18 mm P-touch strips.

The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

- for illumination and monitoring circuit
- also for KNX applications: push-button, 1gang, and group push-button, 1gang

Suitable for	Order no.	Page
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	★ 1696 60 72	10
polar white velvety	1696 60 79	10
anthracite velvety, lacquered	1696 60 76	10

Rockers for multi-pole rocker switches


Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 71 00.



Rocker with imprint "0"

Suitable for	Order no.	Page
Multi-pole rocker switches		page 25
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	★ 1622 60 82	10
polar white velvety	1622 60 89	10
anthracite velvety, lacquered	1622 60 86	10



Rocker with imprint "0"

- orange lens



The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

- for illumination and monitoring circuit
- also for KNX applications: group push-button, 1gang

Suitable for	Order no.	Page
Multi-pole rocker switches		page 25
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	★ 1624 60 82	10
polar white velvety	1624 60 89	10
anthracite velvety, lacquered	1624 60 86	10

Multiple Rockers






Rocker 2gang

- also for KNX applications: push-button, 2gang, and group push-button, 2gang


Suitable for	Order no.	Page
Rocker switches, 2gang		page 28
Series push-buttons		page 28

Design	Order no.	PU
white velvety	★ 1623 60 82	10
polar white velvety	1623 60 89	10
anthracite velvety, lacquered	1623 60 86	10


<p>New</p> 	<p>Rocker 2gang</p> <ul style="list-style-type: none"> ■ lens  <p>Illumination only possible by 1 neon lamp unit.</p> <p>Lenses available in orange and clear.</p>	<ul style="list-style-type: none"> – for illumination and monitoring circuit – also for KNX applications: push-button, 2gang, and group push-button, 2gang 	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>Rocker switches, 2gang</td> <td></td> <td>page 28</td> </tr> <tr> <td>Series push-buttons</td> <td></td> <td>page 28</td> </tr> </table>	Suitable for	Order no.	Page	Rocker switches, 2gang		page 28	Series push-buttons		page 28			
Suitable for	Order no.	Page													
Rocker switches, 2gang		page 28													
Series push-buttons		page 28													
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1627 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1627 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1627 60 86</td> <td>10</td> </tr> </table>		Design	Order no.	PU	white velvety	* 1627 60 82	10	polar white velvety	1627 60 89	10	anthracite velvety, lacquered	1627 60 86	10		
Design	Order no.	PU													
white velvety	* 1627 60 82	10													
polar white velvety	1627 60 89	10													
anthracite velvety, lacquered	1627 60 86	10													


<p>New</p> 	<p>Rocker 3gang</p>	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>On/off switch 3gang</td> <td>6330 23</td> <td>30</td> </tr> </table>	Suitable for	Order no.	Page	On/off switch 3gang	6330 23	30							
Suitable for	Order no.	Page													
On/off switch 3gang	6330 23	30													
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1665 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1665 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1665 60 86</td> <td>10</td> </tr> </table>		Design	Order no.	PU	white velvety	* 1665 60 82	10	polar white velvety	1665 60 89	10	anthracite velvety, lacquered	1665 60 86	10		
Design	Order no.	PU													
white velvety	* 1665 60 82	10													
polar white velvety	1665 60 89	10													
anthracite velvety, lacquered	1665 60 86	10													

Centre plates for pullcord switches/pullcord push-buttons

<p>New</p> 	<p>Centre plate for pullcord switch/pullcord push-button</p>	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>Pullcord switches/pullcord push-buttons</td> <td></td> <td>page 31</td> </tr> </table>	Suitable for	Order no.	Page	Pullcord switches/pullcord push-buttons		page 31							
Suitable for	Order no.	Page													
Pullcord switches/pullcord push-buttons		page 31													
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1146 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1146 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1146 60 86</td> <td>10</td> </tr> </table>		Design	Order no.	PU	white velvety	* 1146 60 82	10	polar white velvety	1146 60 89	10	anthracite velvety, lacquered	1146 60 86	10		
Design	Order no.	PU													
white velvety	* 1146 60 82	10													
polar white velvety	1146 60 89	10													
anthracite velvety, lacquered	1146 60 86	10													

Centre plates for key switches/key push-buttons

 Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 70 00.

<p>New</p> 	<p>Centre plate for key switch/key push-button</p>	<ul style="list-style-type: none"> – for master-key systems 	<table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>Key switches/key push-buttons</td> <td></td> <td>page 32</td> </tr> <tr> <td>Lock cylinder</td> <td>1818 ..</td> <td>60</td> </tr> <tr> <td>optional</td> <td></td> <td></td> </tr> <tr> <td>Sealing set for key switch/key push-button</td> <td>1010 70 00</td> <td>223</td> </tr> </table>	Suitable for	Order no.	Page	Key switches/key push-buttons		page 32	Lock cylinder	1818 ..	60	optional			Sealing set for key switch/key push-button	1010 70 00	223
Suitable for	Order no.	Page																
Key switches/key push-buttons		page 32																
Lock cylinder	1818 ..	60																
optional																		
Sealing set for key switch/key push-button	1010 70 00	223																
<table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1507 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1507 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1507 60 86</td> <td>10</td> </tr> </table>		Design	Order no.	PU	white velvety	* 1507 60 82	10	polar white velvety	1507 60 89	10	anthracite velvety, lacquered	1507 60 86	10					
Design	Order no.	PU																
white velvety	* 1507 60 82	10																
polar white velvety	1507 60 89	10																
anthracite velvety, lacquered	1507 60 86	10																

Berker.Net - Conventional electronics platform

Buttons for switches/dimmers

New **Button 1gang** **i** 468

Operating voltage via insert – with 2-push-buttons operation concept
– low intrinsic energy requirement

Suitable for	Order no.	Page
Switch insert 1gang	8512 11 00	44
Relay insert	8512 12 00	43
Touch dimmer (R, L)	8542 11 00	45
Universal touch dimmer 1gang	8542 12 00	45
DALI/DSI control insert	8542 17 00	46

Design Order no. PU

white velvety	* 8514 11 22	1
polar white velvety	8514 11 29	1
anthracite velvety, lacquered	8514 11 26	1

New **Button 2gang** **i** 468

Operating voltage via insert – with 2-push-buttons operation concept per series
– low intrinsic energy requirement

Suitable for	Order no.	Page
Switch insert 2gang	8512 22 00	44
Universal touch dimmer 2gang	8542 21 00	46

Design Order no. PU

white velvety	* 8514 21 22	1
polar white velvety	8514 21 29	1
anthracite velvety, lacquered	8514 21 26	1

Motion detector covers

New **IR Motion detector comfort** **i** 468

Delay time, adjustable $\approx 10\text{ s} \dots 30\text{ min}$ – with memory function for presence simulation
Response brightness, adjustable $\approx 5 \dots 1000\text{ lx}, \infty\text{ lx (day)}$ – teach function for response brightness via button
– with keylock
– party function for switching on for 2 hours
– with button for on/off/automatic
– step operation with immunity time (e.g. for stair light/impact current circuits)
– low intrinsic energy requirement

Suitable for	Order no.	Page
Inserts		page 68

Design Order no. PU


Nominal mounting height 1.1 m

white velvety	* 8534 12 22	1
polar white velvety	8534 12 29	1
anthracite velvety, lacquered	8534 12 26	1

Nominal mounting height 2.2 m


white velvety	* 8534 22 22	1
polar white velvety	8534 22 29	1
anthracite velvety, lacquered	8534 22 26	1

Q.1/Q.3
Built-in elements

New		Motion detector		i 468	
	Delay time	≈ 180 s	- with memory function for presence simulation		
	Response brightness, adjustable	≈ 5 ... 1000 lx, ∞ lx (day)	- teach function for response brightness via button		
			- with keylock		
			- party function for switching on for 2 hours		
			- with button for on/off/automatic		
			- low intrinsic energy requirement		
	Suitable for		Order no.		Page
	Inserts				page 68
	Design		Order no.		PU
	Nominal mounting height 1.1 m				
	white velvety	* 8534 11 22			1
	polar white velvety	8534 11 29			1
	anthracite velvety, lacquered	8534 11 26			1
	Nominal mounting height 2.2 m				
	white velvety	* 8534 21 22			1
	polar white velvety	8534 21 29			1
	anthracite velvety, lacquered	8534 21 26			1




Blind buttons

New		Blind button		i 468	
	Delay time, adjustable	0 s ... 500 s	- memory function for automatic execution of learned up and down times with position		
	Venetian blind movement time	2 min	- party function, no execution of automatic, radio and extension unit commands (lock-out protection)		
	Minimum slat adjustment time	≈ 250 ms	- with imprinted symbol arrows		
	Change-over time for change of direction	< 0.6 s	- low intrinsic energy requirement		
	Can be switched to orientation led by extension unit - this function will be available from Q3 2015.			Suitable for	Order no.
				Blind insert comfort	8522 11 00
	Design		Order no.		PU
	white velvety	* 8524 11 22			1
	polar white velvety	8524 11 29			1
	anthracite velvety, lacquered	8524 11 26			1



Time switches for blinds

New		Blind time switch		i 468	
	- display		- with keylock		
			- party function, no execution of automatic, radio and extension unit commands (lock-out protection)		
			- reset function (to factory setting)		
			- indication of the application module/insert compatibility in the display		
			- LC display illuminated during operation		
			- LC display contrast is adjustable		
			- low intrinsic energy requirement		
			- with switchover manual/automatic mode		
			- with automatic summer-/winter time switching (can be switched off)		
			- 2 independent preset programme memories, individually adaptable		
		- astro programme for sunrise/sundown switching with city/country or co-ordinate input, individually adaptable			
		- holiday programme for random variation of the operation times in automatic operation			
	Suitable for		Order no.		Page
	Blind insert comfort		8522 11 00		91
	Design		Order no.		PU
	white velvety	* 8574 11 22			1
	polar white velvety	8574 11 29			1
	anthracite velvety, lacquered	8574 11 26			1



Covers for dimmers

Centre plates for rotary dimmers



Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New



Centre plate for rotary dimmer



- setting knob



Axis dimension Ø

4 mm

Design

Suitable for optional

Sealing set for socket outlets/centre plates

Order no.

1010 72 00

Page

223

Design	Order no.	PU
white velvety	★ 1137 60 82	10
polar white velvety	1137 60 89	10
anthracite velvety, lacquered	1137 60 86	10

Covers for blind switches/push-buttons

Rockers with imprint

New

Rocker 2gang with imprinted arrow symbol



- also for KNX applications: push-button, 2gang

Suitable for

Switches/ push-buttons for blinds

Order no.

5034 04

Page

page 84

Design

Order no.

PU

white velvety	★ 1625 60 82	10
polar white velvety	1625 60 89	10
anthracite velvety, lacquered	1625 60 86	10

New

Rocker 2gang with imprinted arrows symbol



- also for KNX applications: group push-button, 2gang

Suitable for

Group series push-button, 4 NO contacts, common input terminal

Order no.

5034 04

Page

29

Design

Order no.

PU

white velvety	★ 1644 60 82	10
polar white velvety	1644 60 89	10
anthracite velvety, lacquered	1644 60 86	10

Centre plates for rotary switches for blinds




Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New



Centre plate with rotary knob for rotary switch for blinds



- with imprint

Suitable for optional

Sealing set for socket outlets/centre plates
Interlock disk for rotary switch for blinds

Order no.

1010 72 00
1861

Page

223
87


Design












Order no.

PU

white velvety	★ 1080 60 82	1
polar white velvety	1080 60 89	1
anthracite velvety, lacquered	1080 60 86	1

Centre plates for key switches/key push-buttons for blinds


 Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 70 00.


 	<p>Centre plate with lock and push lock function for switch for blinds</p> <ul style="list-style-type: none"> key can be removed in 0 position 	<ul style="list-style-type: none"> with imprint with 2 keys 	<p>Suitable for</p> <ul style="list-style-type: none"> Switch for blinds 2pole for centre plate with lock Switch for blinds 1pole for centre plate with lock 	<p>Order no.</p> <ul style="list-style-type: none"> 3852 3851 	<p>Page</p> <ul style="list-style-type: none"> 87 87
	Design	Order no.	PU		
	white velvety	* 1081 60 82			1
	polar white velvety	1081 60 89			1
anthracite velvety, lacquered	1081 60 86			1	
 	<p>Centre plate with lock and push lock function for switch for blinds</p> <ul style="list-style-type: none"> Key can be removed in 3 positions 	<ul style="list-style-type: none"> with imprint with 2 keys 	<p>Suitable for</p> <ul style="list-style-type: none"> Switch for blinds 2pole for centre plate with lock Switch for blinds 1pole for centre plate with lock 	<p>Order no.</p> <ul style="list-style-type: none"> 3852 3851 	<p>Page</p> <ul style="list-style-type: none"> 87 87
	Design	Order no.	PU		
	white velvety	* 1082 60 82			1
	polar white velvety	1082 60 89			1
anthracite velvety, lacquered	1082 60 86			1	
 	<p>Centre plate with lock and touch function for switch for blinds</p> <ul style="list-style-type: none"> key can be removed in 0 position 	<ul style="list-style-type: none"> with imprint with 2 keys 	<p>Suitable for</p> <ul style="list-style-type: none"> Switch for blinds 1pole for centre plate with lock Switch for blinds 2pole for centre plate with lock 	<p>Order no.</p> <ul style="list-style-type: none"> 3851 3852 	<p>Page</p> <ul style="list-style-type: none"> 87 87
	Design	Order no.	PU		
	white velvety	* 1083 60 82			1
	polar white velvety	1083 60 89			1
anthracite velvety, lacquered	1083 60 86			1	
 	<p>Centre plate for key push-button for blinds/key switch</p>	<ul style="list-style-type: none"> with imprint for master-key systems 	<p>Suitable for</p> <ul style="list-style-type: none"> Switch for blinds 1pole for lock cylinder Switch for blinds 2pole for lock cylinder Push-button for blinds 1pole for lock cylinder Push-button for blinds 2pole for lock cylinder Lock cylinder optional Sealing set for key switch/key push-button 	<p>Order no.</p> <ul style="list-style-type: none"> 3821 20 3822 10 3831 .. 3832 10 1818 .. 1010 70 00 	<p>Page</p> <ul style="list-style-type: none"> 89 89 89 90 60 223
	Design	Order no.	PU		
	white velvety	* 1506 60 82			10
	polar white velvety	1506 60 89			10
anthracite velvety, lacquered	1506 60 86			10	


Communication/multimedia technology



- For information on suitable third-party manufacturer articles, see the chapter "Communication/multimedia technology"

Covers data communications / telecommunications



<p>New</p> 	<p>Centre plate with TAE cut-out</p> <p>- also for KNX applications: USB data interface, flush-mounted</p> <table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>230 V USB charging socket outlet</td> <td>2600 0 ..</td> <td>120</td> </tr> <tr> <td>Loudspeaker connection box</td> <td>4572 0 ..</td> <td>121</td> </tr> <tr> <td>Stereo loudspeaker connection box</td> <td>4573 0 ..</td> <td>122</td> </tr> <tr> <td>Modular FCC socket outlet 8/8pole, cat.6A</td> <td>4584</td> <td>103</td> </tr> <tr> <td>Modular FCC socket outlet 8/8pole shielded, cat.6 iso</td> <td>4588</td> <td>103</td> </tr> </table> <table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1033 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1033 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1033 60 86</td> <td>10</td> </tr> </table>	Suitable for	Order no.	Page	230 V USB charging socket outlet	2600 0 ..	120	Loudspeaker connection box	4572 0 ..	121	Stereo loudspeaker connection box	4573 0 ..	122	Modular FCC socket outlet 8/8pole, cat.6A	4584	103	Modular FCC socket outlet 8/8pole shielded, cat.6 iso	4588	103	Design	Order no.	PU	white velvety	* 1033 60 82	10	polar white velvety	1033 60 89	10	anthracite velvety, lacquered	1033 60 86	10
Suitable for	Order no.	Page																													
230 V USB charging socket outlet	2600 0 ..	120																													
Loudspeaker connection box	4572 0 ..	121																													
Stereo loudspeaker connection box	4573 0 ..	122																													
Modular FCC socket outlet 8/8pole, cat.6A	4584	103																													
Modular FCC socket outlet 8/8pole shielded, cat.6 iso	4588	103																													
Design	Order no.	PU																													
white velvety	* 1033 60 82	10																													
polar white velvety	1033 60 89	10																													
anthracite velvety, lacquered	1033 60 86	10																													


<p>New</p> 	<p>Centre plate for FCC socket outlet</p> <p>- for 1gang socket outlet cat.3, cat.5e, cat.6 and cat.6_A iso - for WLAN access-points - with 45° oblique outlet</p> <table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>FCC socket outlets 1gang/WLAN access points</td> <td></td> <td>page 98</td> </tr> </table> <table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1407 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1407 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1407 60 86</td> <td>10</td> </tr> </table>	Suitable for	Order no.	Page	FCC socket outlets 1gang/WLAN access points		page 98	Design	Order no.	PU	white velvety	* 1407 60 82	10	polar white velvety	1407 60 89	10	anthracite velvety, lacquered	1407 60 86	10
Suitable for	Order no.	Page																	
FCC socket outlets 1gang/WLAN access points		page 98																	
Design	Order no.	PU																	
white velvety	* 1407 60 82	10																	
polar white velvety	1407 60 89	10																	
anthracite velvety, lacquered	1407 60 86	10																	


<p>New</p> 	<p>Centre plate for FCC socket outlet 2gang</p> <p>- for 2gang socket outlet cat.3, cat.5e, cat.6 and cat.6_A iso - with 45° oblique outlet</p> <table border="0"> <tr> <td>Suitable for</td> <td>Order no.</td> <td>Page</td> </tr> <tr> <td>FCC socket outlets 2gang</td> <td></td> <td>page 101</td> </tr> </table> <table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1409 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1409 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1409 60 86</td> <td>10</td> </tr> </table>	Suitable for	Order no.	Page	FCC socket outlets 2gang		page 101	Design	Order no.	PU	white velvety	* 1409 60 82	10	polar white velvety	1409 60 89	10	anthracite velvety, lacquered	1409 60 86	10
Suitable for	Order no.	Page																	
FCC socket outlets 2gang		page 101																	
Design	Order no.	PU																	
white velvety	* 1409 60 82	10																	
polar white velvety	1409 60 89	10																	
anthracite velvety, lacquered	1409 60 86	10																	


<p>New</p> 	<p>Centre plate with dust protection slider</p> <p>- labelling field</p>  <p>Labelling field height arranged for P-touch strips 6 mm.</p> <p>- for supporting plates with coloured mounting device, 1gang, order no. 4540 .. and 454201, see "Communication/multimedia technology"</p> <table border="0"> <tr> <td>Design</td> <td>Order no.</td> <td>PU</td> </tr> <tr> <td>white velvety</td> <td>* 1170 60 82</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1170 60 89</td> <td>10</td> </tr> <tr> <td>anthracite velvety, lacquered</td> <td>1170 60 86</td> <td>10</td> </tr> </table>	Design	Order no.	PU	white velvety	* 1170 60 82	10	polar white velvety	1170 60 89	10	anthracite velvety, lacquered	1170 60 86	10
Design	Order no.	PU											
white velvety	* 1170 60 82	10											
polar white velvety	1170 60 89	10											
anthracite velvety, lacquered	1170 60 86	10											


Q.1/Q.3
Built-in elements

	Centre plate with 2 dust protection sliders		
	<ul style="list-style-type: none"> ■ labelling field 	<ul style="list-style-type: none"> – for supporting plates with coloured mounting devices, 2gang, order no. 4541 ..and 454202 see "Communication/multimedia technology" 	
	Labelling field height arranged for P-touch strips 6 mm.		
Design	Order no.		PU
white velvety	* 1181 60 82		10
polar white velvety	1181 60 89		10
anthracite velvety, lacquered	1181 60 86		10

	Central plate for 3 MINI-COM modules		
	<p>Caution! Use only with intermediate ring for central plate from the corresponding range.</p>	<ul style="list-style-type: none"> – with 30° oblique outlet – for Mini-Com jacks cat.3, cat.5e, cat.6, cat.6 10Gig – for Mini-Com fibre-optic modules – for Mini-Com dummy modules 1gang – labelling field latchable 	
Design	Order no.	Suitable for Multimedia modules Intermediate rings	Order no. Page page 402 page 218
polar white matt/velvety	1427 19 09		PU 10

	Central plate for Reichle&De-Massari single modules		
	<p>Caution! Use only with intermediate ring for central plate from the corresponding range.</p>	<ul style="list-style-type: none"> – with 30° oblique outlet – for fibre-optic modules – for connecting modules RJ45 cat.5e and cat.6 – labelling field latchable 	
Design	Order no.	Suitable for Intermediate rings	Order no. Page page 218
polar white matt/velvety	1472 19 09		PU 10

	Central plate for Reichle&De-Massari double module		
	<p>Caution! Use only with intermediate ring for central plate from the corresponding range.</p>	<ul style="list-style-type: none"> – with 30° oblique outlet – for fibre-optic modules – for connecting modules RJ45 cat.5e and cat.6 – labelling field latchable 	
Design	Order no.	Suitable for Intermediate rings	Order no. Page page 218
polar white matt/velvety	1461 19 09		PU 10

	Central plate 2gang for AMP jacks		
	<p>Indexing dimension (W x H) ≈ 14.7 x 20.7 mm</p> <p>Caution! Use only with intermediate ring for central plate from the corresponding range.</p>	<ul style="list-style-type: none"> – with 30° oblique outlet – for AMP fibre-optic couplings MT-RJ jacks – for AMP modular jacks series 110 Connect cat.3, cat.5, cat.5e and cat.6 – labelling field latchable 	
Design	Order no.	Suitable for Intermediate rings	Order no. Page page 218
polar white matt/velvety	1463 19 09		PU 10



Central plate 2gang for Krone jacks

Indexing dimension (W x H) ≈ 14.7 x 19.4 mm

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for 3M fibre-optic couplings Volition
- for Krone fibre-optic couplings MT-RJ jacks
- for Krone modular jacks cat.5, cat.5e and cat.6

Design
polar white matt/velvety

Suitable for	Order no.	Page
Intermediate rings		page 218
Order no.		PU
	1464 19 09	10



Central plate for fibre-optic couplings Simplex ST

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for 2 fibre-optic couplings

Design
polar white matt/velvety, 2gang

Suitable for	Order no.	Page
Intermediate rings		page 218
Order no.		PU
	1492 19 09	10



Central plate for fibre-optic couplings Duplex SC


Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 30° oblique outlet
- for 1 or 2 fibre-optic couplings
- 1 knock out opening

Design
polar white matt/velvety

Suitable for	Order no.	Page
Intermediate rings		page 218
Order no.		PU
	1480 19 09	10

Covers for aerial sockets



New

Centre plate for aerial socket 2-/3hole

- with knock out SAT input

Design
white velvety
polar white velvety
anthracite velvety, lacquered

Suitable for	Order no.	Page
Aerial socket 2hole single box	4502 10	113
Aerial socket 2hole throughpass socket	4515 ..	113
Aerial socket 3hole single box	4522 10	113
Order no.		PU
	* 1203 60 82	10
	1203 60 89	10
	1203 60 86	10



Central plate for aerial socket 4hole (Ankaro)

Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 2 additional SAT outputs (F-sockets)

Design
polar white matt/velvety

Suitable for	Order no.	Page
Intermediate rings		page 218
Aerial socket 4hole single box	4594 10	114
Order no.		PU
	1484 19 09	10



Central plate for aerial socket 4hole (Hirschmann)


Caution!
Use only with intermediate ring for central plate from the corresponding range.

- with 2 additional SAT outputs (F-sockets)

Design
polar white matt/velvety

Suitable for	Order no.	Page
Intermediate rings		page 218
Order no.		PU
	1483 19 09	10

Q.1/Q.3
Built-in elements



Central plate for broadband modem socket (Wisi)


Caution!
Use only with intermediate ring for central plate from the corresponding range.

– with additional multimedia output

Suitable for Intermediate rings	Order no.	Page page 218
---	------------------	-------------------------

Design	Order no.	PU
polar white matt/velvety	# 1439 19 09	10

Central plates for signalling and command units



Central plate with installation opening Ø 18.8 mm

Screw spacing 36 mm

– labelling field latchable
– with cut-out dia. 18.8 mm

Caution!
Use only with intermediate ring for central plate from the corresponding range.

Suitable for Intermediate rings optional Built-in socket for floating output	Order no. 4604	Page page 218 65
---	------------------------------	-----------------------------------

Design	Order no.	PU
polar white, matt/velvety	1431 19 09	10



Central plate with installation opening Ø 22.5 mm

Screw spacing 36 mm

– labelling field latchable
– with cut-out dia. 22.5 mm

Caution!
Use only with intermediate ring for central plate from the corresponding range.

Installation aperture according to IEC 60947-5-1

Suitable for Intermediate rings	Order no.	Page page 218
---	------------------	-------------------------

Design	Order no.	PU
polar white matt/velvety	1432 19 09	10
yellow glossy	1432 07	10

Intermediate rings

New



Intermediate ring for central plate

– labelling field latchable

Suitable for optional Labelling field for intermediate ring	Order no. 1905 00 ..	Page 119
---	--------------------------------	--------------------

Design	Order no.	PU
white velvety	* 1109 60 82	10
polar white velvety	1109 60 89	10
anthracite velvety, lacquered	1109 60 86	10



Labelling field for intermediate ring

Labelling field height arranged for P-touch strips 6 mm.

Suitable for Intermediate ring for central plate	Order no.	Page page 218
--	------------------	-------------------------

Design	Order no.	PU
white glossy	1905 00 02	10
polar white glossy	1905 00 69	10

Adapter rings for centre plates 50 x 50 mm

New



Adapter ring for centre plate 50 x 50 mm

Caution!
Not suitable for Berker central plates.
For centre plate according to DIN 49075

– for centre plate of third-party manufacturers with external dimension 50 x 50 mm

Design	Order no.	PU
white velvety	* 1109 60 72	10
polar white velvety	1109 60 79	10
anthracite velvety, lacquered	1109 60 76	10

Covers Audio



New

Centre plate for loudspeaker socket outlet

- 1 knock out opening

Design	Order no.	PU
white velvety	* 1196 60 82	10
polar white velvety	1196 60 89	10
anthracite velvety, lacquered	1196 60 86	10

Suitable for	Order no.	Page
Entry for small connector	4505	123
Loudspeaker socket outlet High End	4505 02	123



Central plate for XLR D-series connector

Cut-out Ø 23.6 mm - Labelling field latchable in matching intermediate ring
Screw spacing (horizontal/vertical) 19/24 mm - speakon and jack connector

Caution!
Use only with intermediate ring for central plate from the corresponding range.

Design	Order no.	PU
polar white matt/velvety	1412 19 09	10

Suitable for	Order no.	Page
Intermediate rings		page 218

Video socket outlets



New

VGA socket outlet

Frequency range video max. 160 MHz - with 15pole D-subminiature double jack
Resolution max. 1280 x 1024 px - S-VGA compatible

i 461

Design	Order no.	PU
with double jack		
white velvety	* 33 1540 60 82	10
polar white velvety	33 1540 60 89	10
anthracite velvety, lacquered	33 1540 60 86	10
back side, with screw-in lift terminals		
white velvety ¹⁾	* 33 1541 60 82	10
polar white velvety ¹⁾	33 1541 60 89	10
anthracite velvety, lacquered ¹⁾	33 1541 60 86	10

¹⁾ for connection to a 15-core VGA cable, conductor cross-section (rigid) max. 1.5 mm²



Multimedia sockets



New

High definition socket outlet

Transmission rate max. 8.16 GBit/s - 19pole
Resolution max. 1920 x 1080 px - with HDMI™ double jack type A, supports HDMI™ technology (V 1.3 with Deep Color)
- gold-plated contacts

i 467

Design	Order no.	PU
back side, with straight socket		
white velvety	* 33 1542 60 82	10
polar white velvety	33 1542 60 89	10
anthracite velvety, lacquered	33 1542 60 86	1
back side, with 90° angle socket		
white velvety	* 33 1543 60 82	10
polar white velvety	33 1543 60 89	10
anthracite velvety, lacquered	33 1543 60 86	10




Q.1/Q.3
Built-in elements

New

3 x Cinch/S-Video socket outlet **i** 467

Frequency range audio 20 ... 20000 Hz
Frequency range video max. 160 MHz

- 1 cinch double jack for video connection (yellow)
- 2 cinch double jacks for audio connection (red, white)
- S-Video double jack
- gold-plated contacts



S-Video
CINCH


Design	Order no.	PU
white velvety	* 33 1532 60 82	10
polar white velvety	33 1532 60 89	10
anthracite velvety, lacquered	33 1532 60 86	10

New

USB/3,5 mm audio socket outlet **i** 467

USB transmission rate max. 480 Mbit/s
Frequency range audio 20 ... 20000 Hz

- double jack gold-plated 3.5 mm, stereo
- USB double jack type A, USB 2.0 capable



Design	Order no.	PU
white velvety	* 33 1539 60 82	10
polar white velvety	33 1539 60 89	10
anthracite velvety, lacquered	33 1539 60 86	10

Consumer electronics


New

Berker Radio Touch

Operating voltage 230 V~
Frequency 50/60 Hz
Conductor cross-section max. 2,5 mm²
Dimensions of display (W x H) 35 x 28 mm
Insertion depth 33 mm
Frequency range (radio reception) 87,5 ... 108 MHz

- operation via sensor areas of the touch display
- extension unit input for separate on/off switching
- illuminated touch graphics display
- time and date display
- with 2 loudspeaker connections
- external audio input, e.g. for MP3 player or docking station
- stereo FM radio with RDS display

At least one loudspeaker must be connected for operation.



Design	Order no.	PU
white velvety	* 2884 60 82	1
polar white velvety	* 2884 60 89	1
anthracite velvety, lacquered	* 2884 60 86	1

Suitable for	Order no.	Page
Loudspeaker		page 220
Ceiling loudspeaker Ø 140 mm	WUZ6 71	130
Ceiling loudspeaker Ø 80 mm	WUZ6 72	131


FM

New

Loudspeaker

Impedance 4 Ω
Conductor cross-section (flexible) 0,5 mm²
Pre-assembled cable ≈ 25 cm
Insertion depth 35 mm

- confectioned, with 2-core, double-insulated, flexible cable



Design	Order no.	PU
white velvety	* 2882 60 82	1
polar white velvety	2882 60 89	1
anthracite velvety, lacquered	2882 60 86	1

Suitable for	Order no.	Page
Berker Radio Touch		page 220

Pilot lamps

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 72 00.

New		Centre plate for push-button/pilot lamp E10			
	Cut-out Ø	27.2 mm	– centre plate for plug-in fixing		
				Suitable for	Order no.
				Covers and push-buttons	
				LED lamp E10	
			Neon lamp E10		
			Push-button/pilot lamp E10, NO contact	5101 ..	51
	Design		Order no.		PU
	white velvety		* 1124 60 82		10
	polar white velvety		1124 60 89		10
	anthracite velvety, lacquered		1124 60 86		10



New		Centre plate for pilot lamp E14			
				Suitable for	Order no.
				Covers and push-buttons	
				LED lamp E14	
				Incandescent lamp E14	
			Pilot lamp E14	5131 02	52
			optional		
			Sealing set for socket outlets/centre plates	1010 72 00	223
	Design		Order no.		PU
	white velvety		* 1198 60 82		10
	polar white velvety		1198 60 89		10
	anthracite velvety, lacquered		1198 60 86		10

LED signal lights



New		LED signal light, white lighting		i	451
	Rated voltage	230 V~	– Brightness modifiable via potentiometer		
	Frequency	50/60 Hz	– Light colour cold white		
	Power consumption	at 230 ~, 50 Hz - max. 1 W	– switchable via separate switch		
	Quantity LED lamps	4	– for signalling notices, information or warnings		
Ambient temperature	-15 ... +40 °C	– Foils with imprint of symbols insertable			
Conductor cross-section	2.5 mm ²				
	For installation in standard wall boxes according to DIN 49073-1			Suitable for optional	Order no.
				Foil for LED signal light	page 49
	Design		Order no.		PU
	white velvety		* 2953 60 82		1
	polar white velvety		* 2953 60 89		1
	anthracite velvety		* 2953 60 86		1



New		LED signal light, RGB		i	451
	Rated voltage	230 V~	– Brightness modifiable via potentiometer		
	Frequency	50/60 Hz	– Light colours cold white, warm white, blue, orange, red, green, purple (magenta) and colour sequence callable via push-button		
	Power consumption	at 195 ... 265 V~, 50/60 Hz max. 2 W	– Colour sequence can be stopped at any position via the push-button.		
	Quantity LED lamps	4	– colour is switchable via an external switch		
Ambient temperature	-15 ... +40 °C	– for signalling notices, information or warnings			
Conductor cross-section	2.5 mm ²	– Foils with imprint of symbols insertable			
	For installation in standard wall boxes according to DIN 49073-1			Suitable for optional	Order no.
				Foil for LED signal light	page 49
	Design		Order no.		PU
	white velvety		* 2951 60 82		1
	polar white velvety		* 2951 60 89		1
	anthracite velvety		* 2951 60 86		1


Q.1/Q.3
Built-in elements

	LED signal light, red/green lighting		i 451
	Rated voltage	230 V~	– switchable between red and green via separate switches
	Frequency	50/60 Hz	– for signalling of e.g. access control
	Power consumption	at 230 ~, 50 Hz - per colour max. 0.5 W	– Two coloured foils with imprinted symbols for Do not disturb/ Clean room and Please enter/ Please wait are supplied
	Quantity LED lamps	max. 0.5 W	
	Ambient temperature	-15 ... +40 °C	
	Conductor cross-section	2.5 mm ²	
		Suitable for optional	Order no.
		Foil bi-colour for LED signal light	page 50
	For installation in standard wall boxes according to DIN 49073-1		
	Design	Order no.	PU
	white velvety	* 2952 60 82	1
	polar white velvety	* 2952 60 89	1
	anthracite velvety	* 2952 60 86	1

Supplementary products

	Blind plug with centre plate		
			– on supporting plate without cut-out
		Suitable for optional	Order no.
		Sealing set for socket outlets/centre plates	1010 72 00
			Page 223
	Design	Order no.	PU
	without spreader claws		
	white velvety	* 1009 60 82	20
	polar white velvety	1009 60 89	20
	anthracite velvety, lacquered	1009 60 86	20
	with base and spreader claws		
	white velvety	* 67 1009 60 82	10
	polar white velvety	67 1009 60 89	10
	anthracite velvety, lacquered	67 1009 60 86	10

	Blind plug with centre plate, screw-on		
			– on supporting plate with large cut-out – with cover plug for screw fitting – without spreader claws – space-saving for relays, etc. – for customised cut-outs or holes when installing special solutions
		Suitable for optional	Order no.
		Sealing set for socket outlets/centre plates	1010 72 00
			Page 223
	Design	Order no.	PU
	white velvety	* 1009 60 72	20
	polar white velvety	1009 60 79	20
	anthracite velvety, lacquered	1009 60 76	20

	Centre plate for cable outlet		
		Suitable for	Order no.
		Cable outlet with low installation depth	4468
		Cable outlet	4470
			Page 116
	Design	Order no.	PU
	white velvety	* 1019 60 82	10
	polar white velvety	1019 60 89	10
	anthracite velvety, lacquered	1019 60 86	10

Sealings IP44



Sealing set for socket outlets/centre plates

Suitable for	Order no.	Page
Centre plates for rotary dimmers		page 213
Centre plates for rotary switches for blinds		page 213
SCHUKO socket outlet with hinged cover and imprint		page 200
Blind plug with centre plate		page 222
Frames		page 232
Frames		page 238

Design	Order no.	PU
transparent	1010 72 00	1



Sealing set for switches/push-buttons

- also for KNX applications: push-button, 1gang, and group push-button, 1gang
- with IP44 fixing piece to screw on

Suitable for	Order no.	Page
Rockers		page 206
Rockers for multi-pole rocker switches		page 209
Rockers - accessible construction		page 224
Frames		page 232
Frames		page 238

Design	Order no.	PU
transparent	1010 71 00	1




Sealing set for key switch/key push-button

Suitable for	Order no.	Page
Frames		page 232
Frames		page 238
Centre plate for key push-button for blinds/key switch	1506 60 8 ..	90
Centre plate for key switch/key push-button	1507 60 8 ..	33

Design	Order no.	PU
transparent	1010 70 00	1

Hotel applications



New

Relay switch with centre plate for hotel card

i 451

Rated voltage	230 V~ +10/-15 %	- with potentiometer for incremental adjustment of delay time
Frequency	50/60 Hz	- for illumination
Switching current	10 A	- with potential-free contact
Power consumption	< 0,2 W	- with screw-in lift terminals
230 V incandescent lamps and halogen lamps	1500 W	- illuminated with blue LED if hotel card is not inserted
Conventional transformers	1500 VA	
Electronic transformers	1500 W	
Fluorescent lamps:		
- in Duo circuit	1500 W	
Compact fluorescent lamps	500 W	
Inductive load at cos φ = 0,6	max. 6 A	
Card width	max. 55 mm	
Card thickness	0,8 ... 1,2 mm	
Operating temperature	-5 ... +50 °C	
Screw terminals (max.)	2 x 2,5 mm ²	
Insertion depth	32 mm	

Neutral conductor necessary!

Design	Order no.	PU
white velvety	* 1640 60 92	1
polar white velvety	* 1640 60 99	1
anthracite velvety	* 1640 60 96	1

Q.1/Q.3
Built-in elements

Centre plates for hotel card switches

New



Centre plate with imprint for push-button for hotel card

- red lens



Card width max. 54 mm
Card thickness 0.5 ... 1.4 mm

Other imprint on request!

Suitable for
Push-button for hotel card

Order no. Page
page 61

Design	Order no.	PU
white velvety	* 1640 60 82	10
polar white velvety	1640 60 89	10
anthracite velvety, lacquered	1640 60 86	10

Accessible construction



The following rockers are conformant with DIN 18024-2 and DIN 18025-1 and -2.

SCHUKO socket outlets

New



SCHUKO socket outlet with hinged cover for barrier-free construction

i 474

- tactile symbol
- enhanced contact protection
- installation position variable in 45° steps

- with self-closing hinged covers
- with plug-in terminals



Rated voltage 250 V~
Rated current 16 A

Specially suited to combinations of several socket outlets if right angle plugs are used.
Connection terminals according to IEC 60884-1



Design	Order no.	PU
white velvety	* 4744 60 42	10
polar white velvety	4744 60 49	10

Rockers - accessible construction

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the sealing set, order no. 1010 71 00.

New



Rocker for barrier-free construction

- guide for mouth rod
- lens

- for illumination and monitoring circuit
- also for KNX applications: push-button, 1 gang, and group push-button, 1 gang









Lenses available in orange and clear.




The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.

Suitable for	Order no.	Page
Rocker switches		page 20
Rocker push-buttons		page 20
optional		
Sealing set for switches/push-buttons	1010 71 00	223

Design	Order no.	PU
white velvety	* 1661 60 42	10
polar white velvety	1661 60 49	10

<p>New </p> 	<p>Rocker for barrier-free construction</p> <ul style="list-style-type: none"> ■ tactile light symbol ■ orange lens   <p>The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.</p>	<ul style="list-style-type: none"> – for illumination and monitoring circuit – also for KNX applications: push-button, 1gang <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Suitable for</th> <th style="text-align: left;">Order no.</th> <th style="text-align: left;">Page</th> </tr> </thead> <tbody> <tr> <td>Rocker switches</td> <td></td> <td>page 20</td> </tr> <tr> <td>Rocker push-buttons</td> <td></td> <td>page 20</td> </tr> <tr> <td>optional</td> <td></td> <td></td> </tr> <tr> <td>Sealing set for switches/push-buttons</td> <td>1010 71 00</td> <td>223</td> </tr> </tbody> </table>	Suitable for	Order no.	Page	Rocker switches		page 20	Rocker push-buttons		page 20	optional			Sealing set for switches/push-buttons	1010 71 00	223
Suitable for	Order no.	Page															
Rocker switches		page 20															
Rocker push-buttons		page 20															
optional																	
Sealing set for switches/push-buttons	1010 71 00	223															
<table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Design</th> <th style="text-align: left;">Order no.</th> <th style="text-align: left;">PU</th> </tr> </thead> <tbody> <tr> <td>white velvety</td> <td>★ 1651 60 42</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1651 60 49</td> <td>10</td> </tr> </tbody> </table>		Design	Order no.	PU	white velvety	★ 1651 60 42	10	polar white velvety	1651 60 49	10							
Design	Order no.	PU															
white velvety	★ 1651 60 42	10															
polar white velvety	1651 60 49	10															

<p>New </p> 	<p>Rocker for barrier-free construction</p> <ul style="list-style-type: none"> ■ tactile bell symbol ■ orange lens   <p>The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.</p>	<ul style="list-style-type: none"> – for illumination and monitoring circuit – for illuminated rocker push-buttons – also for KNX applications: push-button, 1gang <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Suitable for</th> <th style="text-align: left;">Order no.</th> <th style="text-align: left;">Page</th> </tr> </thead> <tbody> <tr> <td>Rocker push-buttons</td> <td></td> <td>page 20</td> </tr> <tr> <td>optional</td> <td></td> <td></td> </tr> <tr> <td>Sealing set for switches/push-buttons</td> <td>1010 71 00</td> <td>223</td> </tr> </tbody> </table>	Suitable for	Order no.	Page	Rocker push-buttons		page 20	optional			Sealing set for switches/push-buttons	1010 71 00	223
Suitable for	Order no.	Page												
Rocker push-buttons		page 20												
optional														
Sealing set for switches/push-buttons	1010 71 00	223												
<table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Design</th> <th style="text-align: left;">Order no.</th> <th style="text-align: left;">PU</th> </tr> </thead> <tbody> <tr> <td>white velvety</td> <td>★ 1651 60 52</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1651 60 59</td> <td>10</td> </tr> </tbody> </table>		Design	Order no.	PU	white velvety	★ 1651 60 52	10	polar white velvety	1651 60 59	10				
Design	Order no.	PU												
white velvety	★ 1651 60 52	10												
polar white velvety	1651 60 59	10												

<p>New </p> 	<p>Rocker for barrier-free construction</p> <ul style="list-style-type: none"> ■ tactile symbol for door opener ■ orange lens   <p>The IP44 degree of protection can only be achieved in conjunction with the appropriate neon, incandescent or LED lamp unit, as well as a sealing set for switches/push-buttons.</p>	<ul style="list-style-type: none"> – for illumination and monitoring circuit – for illuminated rocker push-buttons – also for KNX applications: push-button, 1gang <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Suitable for</th> <th style="text-align: left;">Order no.</th> <th style="text-align: left;">Page</th> </tr> </thead> <tbody> <tr> <td>Rocker push-buttons</td> <td></td> <td>page 20</td> </tr> <tr> <td>optional</td> <td></td> <td></td> </tr> <tr> <td>Sealing set for switches/push-buttons</td> <td>1010 71 00</td> <td>223</td> </tr> </tbody> </table>	Suitable for	Order no.	Page	Rocker push-buttons		page 20	optional			Sealing set for switches/push-buttons	1010 71 00	223
Suitable for	Order no.	Page												
Rocker push-buttons		page 20												
optional														
Sealing set for switches/push-buttons	1010 71 00	223												
<table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Design</th> <th style="text-align: left;">Order no.</th> <th style="text-align: left;">PU</th> </tr> </thead> <tbody> <tr> <td>white velvety</td> <td>★ 1651 60 62</td> <td>10</td> </tr> <tr> <td>polar white velvety</td> <td>1651 60 69</td> <td>10</td> </tr> </tbody> </table>		Design	Order no.	PU	white velvety	★ 1651 60 62	10	polar white velvety	1651 60 69	10				
Design	Order no.	PU												
white velvety	★ 1651 60 62	10												
polar white velvety	1651 60 69	10												

Hospital installations

Emergency system

- For installation in standard wall boxes according to DIN 49073-1

New



Emergency call set with frame

Operating voltage 24 V=
Operating temperature -5 ... +40 °C

Set consisting of:
- Pullcord push-button with frame, order no. 5202..
- Pilot lamp with frame, order no. 5203..
- Shut-off push-button with frame, order no. 5201..
- Power supply with frame, order no. 5204..

For installation in standard wall boxes according to DIN 49073-1

The emergency call set is used to call for help in public or disabled WCs, doctors' surgeries and old people's homes. It corresponds to the safety requirements according to DIN VDE 0834

- acoustic and visual signalling of an emergency call using pilot lamp after the pullcord push-button has been actuated
- switch-off of emergency call using shut-off push-button at emergency location
- power supply via power supply unit with 24 V DC
- centre plates for plug-in fixing
- with screw terminals
- acoustic call tone switchable on pilot lamp
- call tone can be set as continuous signal or as pulses
- monitoring of devices triggering calls for wire break

Suitable for optional	Order no.	Page
Cancellation button with frame	5201 60 8 ..	227
Pull button with frame	5202 60 8 ..	227
Light signal with frame	5203 60 8 ..	227
Mains adapter with frame	5204 60 8 ..	228
Cancellation/presence button with frame	5205 60 8 ..	226
Call button with frame	5206 60 8 ..	226

Design

Order no.

PU

Berker Q.1

white velvety	★ 5200 60 82	1
polar white velvety	5200 60 89	1
Berker Q.3		
polar white velvety	5200 60 99	1

New



Call button with frame

Operating voltage 24 V=
Operating temperature -5 ... +40 °C

Additional call push-button to, for example, provide a control section in a second room or an additional location to trigger an emergency call.

For installation in standard wall boxes according to DIN 49073-1

- with quiet lamp
- with red call button with lens
- as expansion for the emergency call set
- centre plate for plug-in fixing
- with screw terminals

Suitable for	Order no.	Page
Emergency call set with frame	5200 60 8 ..	226

Design

Order no.

PU

Berker Q.1

white velvety	★ 5206 60 82	1
polar white velvety	5206 60 89	1
Berker Q.3		
polar white velvety	5206 60 99	1

New



Cancellation/presence button with frame

Operating voltage 24 V=
Cable length to light signal max. 500 m
Operating temperature -5 ... +40 °C

Office unit, in order to, for example, indicate an emergency call in an office or a headquarters.

For installation in standard wall boxes according to DIN 49073-1

- with yellow shut-off button
- with green presence button
- as expansion for the emergency call set
- centre plate for plug-in fixing
- with screw terminals
- with visual and acoustic alarm encoder

Suitable for	Order no.	Page
Emergency call set with frame	5200 60 8 ..	226


Design


Order no.


PU

Berker Q.1

white velvety	★ 5205 60 82	1
polar white velvety	5205 60 89	1
Berker Q.3		
polar white velvety	5205 60 99	1

<div style="background-color: #00a0e3; color: white; padding: 2px; display: inline-block; font-weight: bold;">New</div> 	<p>Pull button with frame</p> <p>Operating voltage 24 V= – with quiet lamp Operating temperature -5 ... +40 °C – centre plate for plug-in fixing – for wall and ceiling mounting – with screw terminals – with pullcord and knob</p> <p>To trigger an emergency call in emergency situations. For installation in standard wall boxes according to DIN 49073-1</p>	<p>Suitable for Emergency call set with frame</p> <p>Order no. 5200 60 8 ..</p> <p>Page 226</p>
	<p>Design</p> <p>Berker Q.1</p> <p>white velvety * 5202 60 82 1</p> <p>polar white velvety 5202 60 89 1</p> <p>Berker Q.3</p> <p>polar white velvety 5202 60 99 1</p>	<p>Order no.</p> <p>PU</p>

<div style="background-color: #00a0e3; color: white; padding: 2px; display: inline-block; font-weight: bold;">New</div> 	<p>Cancellation button with frame</p> <p>Operating voltage 24 V= – with green shut-off button Operating temperature -5 ... +40 °C – centre plate for plug-in fixing – with screw terminals</p> <p>To switch off the alarm signal (pilot lamp) on arrival at the emergency location. For installation in standard wall boxes according to DIN 49073-1</p>	<p>Suitable for Emergency call set with frame</p> <p>Order no. 5200 60 8 ..</p> <p>Page 226</p>
	<p>Design</p> <p>Berker Q.1</p> <p>white velvety * 5201 60 82 1</p> <p>polar white velvety 5201 60 89 1</p> <p>Berker Q.3</p> <p>polar white velvety 5201 60 99 1</p>	<p>Order no.</p> <p>PU</p>

<div style="background-color: #00a0e3; color: white; padding: 2px; display: inline-block; font-weight: bold;">New</div> 	<p>Light signal with frame</p> <p>Operating voltage 24 V= – centre plate for plug-in fixing Operating temperature -5 ... +40 °C – call tone received on voltage failure and return – with potential-free relay contact for call tone forwarding, e.g. to telephone dialler – with screw terminals – acoustic call tone switchable on pilot lamp – call tone can be set as continuous signal or as pulses – with 4 red LEDs</p> <p>For visual and acoustic alarms in emergency situations. Caution: Always install the device in a clearly visible location. Recommendation: use deep box. For installation in standard wall boxes according to DIN 49073-1</p>	<p>Suitable for Emergency call set with frame</p> <p>Order no. 5200 60 8 ..</p> <p>Page 226</p>
	<p>Design</p> <p>Berker Q.1</p> <p>white velvety * 5203 60 82 1</p> <p>polar white velvety 5203 60 89 1</p> <p>Berker Q.3</p> <p>polar white velvety 5203 60 99 1</p>	<p>Order no.</p> <p>PU</p>

Q.1/Q.3
Built-in elements

New



Mains adapter with frame

Operating voltage	24 V=	– centre plate for plug-in fixing
Frequency	50 ... 60 Hz	– with screw terminals
Input voltage	100 ... 240 V~	
Output voltage	24 V=	
Output current	max. 250 mA	
Input current	max. 180 mA	
Operating temperature	-5 ... +40 °C	

Suitable for	Order no.	Page
Emergency call set with frame	5200 60 8 ..	226

For the power supply of the emergency call system components with 24 V DC.

Recommendation: use deep box.

For installation in standard wall boxes according to DIN 49073-1

Design	Order no.	PU
--------	-----------	----




Berker Q.1

white velvety	★ 5204 60 82	1
polar white velvety	5204 60 89	1

Berker Q.3

polar white velvety	5204 60 99	1
---------------------	------------	---

Central plates for hospital installation



Central plate for socket outlet for equipotential bonding

Caution!
Use only with intermediate ring for central plate from the corresponding range.

For double pole socket outlet for floating output according to DIN 42801

– with imprint

Suitable for	Order no.	Page
Intermediate rings		page 162
Socket outlet for floating output	1061	64

Design	Order no.	PU
polar white matt/velvety	1403 19 09	10

Berker Q.1

You notice the difference the first time you touch it: thanks to its innovative surface, this likable all-rounder has an unmistakable velvety feel – and in elegant anthracite now in an additional attractive colour variant. With its smooth profile, flat switching angle and soft, rounded edges, it is very pleasant to look at.

- Suitable for both residential and non-residential buildings
- Due to the large radii, particularly suitable for projects such as schools and kindergartens
- Combination frames allow you to combine up to 5 devices vertically or horizontally.
- Available surface: white and polar white velvety, anthracite velvety lacquered



DESIGN PLUS


Frames

Plastic, velvety
white
polar white
anthracite, lacquered
red
green
orange

similar to RAL 1013
similar to RAL 9010
similar to RAL 7021
similar to RAL 3003
similar to RAL 6029
similar to RAL 2003

Frames 232

Surface-mounted frames 234

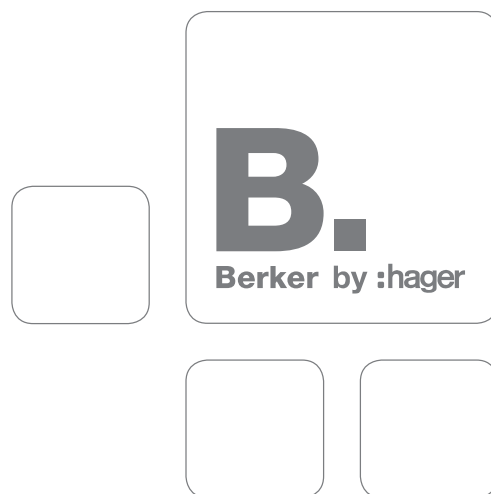

Q.1/O.3
Frames

Frames

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the corresponding sealing set.

	Frame		i 479	
		– for vertical and horizontal mounting		
		Suitable for optional Sealings IP44	Order no.	Page
				page 223
	Design	Order no.		PU
	white velvety, 1gang	* 1011 60 82		10
	white velvety, 2gang	* 1012 60 82		10
white velvety, 3gang	* 1013 60 82		2	
white velvety, 4gang	* 1014 60 82		2	
white velvety, 5gang	* 1015 60 82		2	

	Frame		i 479	
		– for vertical and horizontal mounting		
		Suitable for optional Sealings IP44	Order no.	Page
				page 223
	Design	Order no.		PU
	polar white velvety, 1gang	1011 60 89		10
	polar white velvety, 2gang	1012 60 89		10
polar white velvety, 3gang	1013 60 89		2	
polar white velvety, 4gang	1014 60 89		2	
polar white velvety, 5gang	1015 60 89		2	

	Frame		i 479	
		– for vertical and horizontal mounting		
		Suitable for optional Sealings IP44	Order no.	Page
				page 223
	Design	Order no.		PU
	anthracite velvety, lacquered, 1gang	1011 60 86		10
	anthracite velvety, lacquered, 2gang	1012 60 86		10
anthracite velvety, lacquered, 3gang	1013 60 86		2	
anthracite velvety, lacquered, 4gang	1014 60 86		2	
anthracite velvety, lacquered, 5gang	1015 60 86		2	

	Frame		i 479	
		– for emphasising special switches, socket outlets, etc.		
		– for vertical and horizontal mounting		
		Suitable for optional Sealings IP44	Order no.	Page
				page 223
	Design	Order no.		PU
	red velvety, 1gang	1011 60 62		10
red velvety, 2gang	1012 60 62		10	
red velvety, 3gang	1013 60 62		2	
red velvety, 4gang	1014 60 62		2	
red velvety, 5gang	1015 60 62		2	

New



Frame

- labelling field



Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
white velvety, 1gang	★ 1011 60 12	10
white velvety, 2gang vertical	★ 1012 60 12	10
white velvety, 3gang vertical	★ 1013 60 12	10
white velvety, 4gang vertical	★ 1014 60 12	2
white velvety, 5gang vertical	★ 1015 60 12	2
white velvety, 2gang horizontal	★ 1022 60 12	10
white velvety, 3gang horizontal	★ 1023 60 12	10
white velvety, 4gang horizontal	★ 1024 60 12	2
white velvety, 5gang horizontal	★ 1025 60 12	2



Frame

- labelling field



Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
polar white velvety, 1gang	1011 60 19	10
polar white velvety, 2gang vertical	1012 60 19	10
polar white velvety, 3gang vertical	1013 60 19	10
polar white velvety, 4gang vertical	1014 60 19	2
polar white velvety, 5gang vertical	1015 60 19	2
polar white velvety, 2gang horizontal	1022 60 19	10
polar white velvety, 3gang horizontal	1023 60 19	10
polar white velvety, 4gang horizontal	1024 60 19	2
polar white velvety, 5gang horizontal	1025 60 19	2



Frame

- labelling field



Labelling field height arranged for P-touch strips 6 mm.

Design	Order no.	PU
anthracite velvety, lacquered, 1gang	1011 60 16	10
anthracite velvety, lacquered, 2gang vertical	1012 60 16	10
anthracite velvety, lacquered, 3gang vertical	1013 60 16	10
anthracite velvety, lacquered, 4gang vertical	1014 60 16	2
anthracite velvety, lacquered, 5gang vertical	1015 60 16	2
anthracite velvety, lacquered, 2gang horizontal	1022 60 16	10
anthracite velvety, lacquered, 3gang horizontal	1023 60 16	10
anthracite velvety, lacquered, 4gang horizontal	1024 60 16	2
anthracite velvety, lacquered, 5gang horizontal	1025 60 16	2

Q.1/O.3
Frames

Frames with large cut-out

New





Frame with large cut-out

- for vertical mounting


i 479

Design	Order no.	PU
white velvety	★ 1309 60 82	

	Frame with large cut-out		i 479
	Not suitable for surface-mounted frames.	– for vertical mounting	
	Design	Order no.	PU
	polar white velvety	1309 60 89	10

	Frame with large cut-out		i 479
	Not suitable for surface-mounted frames.	– for vertical mounting	
	Design	Order no.	PU
	anthracite velvety, lacquered	1309 60 86	10

Surface-mounted frames

	Frame surface-mounted			
	Insertion depth	33.5 mm	– entry at top and bottom possible – with cable and duct entry	
	Flush-mounted devices can be used with surface-mounted frames for surface-mounted installation.			
	For matching pipe lead-ins and replacement for cable and duct entries, refer to the chapter Dry surface-mounted installation.			
	Design	Order no.	PU	
	polar white glossy, 1gang	1029 00 69		10
	polar white glossy, 2gang	1030 00 69		10
	polar white glossy, 3gang	1031 00 69		5
	anthracite velvety, lacquered, 1gang	1029 60 86		10
	anthracite velvety, lacquered, 2gang	1030 60 86		10
	anthracite velvety, lacquered, 3gang	1031 60 86		5
	red glossy, 1gang	1029 00 62		10
	red glossy, 2gang	1030 00 62		10
	red glossy, 3gang	1031 00 62		5

Base plates

	Base plate 1gang, self-extinguishing			
	For surface-mounted frames of the design lines: - Berker Q.1 - Berker Arsys	– with imprint – for mounting on combustible base surface – for surface-mounted frame 1gang		
	Design	Order no.	PU	
	white, 1gang	1021 12		10

	Base plate 2gang, self-extinguishing			
	For surface-mounted frames of the design lines: - Berker Q.1 - Berker Arsys	– with imprint – for mounting on combustible base surface – for surface-mounted frame 2gang		
	Design	Order no.	PU	
	white, 2gang	1021 22		10



Base plate 3gang, self-extinguishing

For surface-mounted frames of the design lines:
- Berker Q.1
- Berker Arsys


- with imprint
- for mounting on combustible base surface
- for surface-mounted frame 3gang

	Suitable for	Order no.	Page
Design	Surface-mounted frames		page 234
white, 3gang		1021 32	PU 10

Berker Q.3

Robust. Hardly any term describes the Berker Q.3 better. On the hand, there is its clear contour, on another its scratch-resistant and friendly surface. It is equipped with the same centre plates as its sister programme Berker Q.1. Its functional benefits are also noteworthy: the Berker Q.3 is ideally suited to installations in dado ducts.


- Together with the radii of the central plates, the clear, cornered frame forms a design contrast, which can be ideally integrated into the architecture of modern buildings.
- Combination frames allow you to combine up to 5 devices vertically or horizontally.
- Available surface: white and polar white velvety, anthracite velvety lacquered

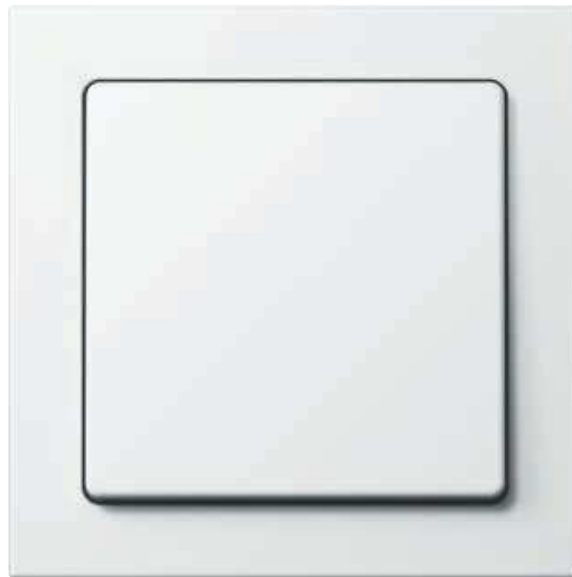

Frames

Plastic, velvety
white
polar white
anthracite, lacquered
red
green
orange


similar to RAL 1013
similar to RAL 9010
similar to RAL 7021
similar to RAL 3003
similar to RAL 6029
similar to RAL 2003

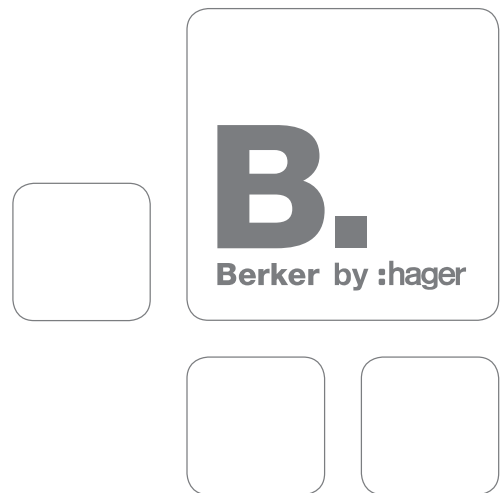



Q.1/O.3
Frames



Frames

Marked items are only suitable for splash-protected IP44 flush-mounted installation when used in conjunction with the corresponding sealing set.

<p>New </p> 	<p>Frame</p> <p>– for vertical and horizontal mounting</p> <p>Suitable for optional Sealings IP44</p> <p>Order no. PU</p> <table border="0"> <tr> <td>white velvety, 1gang</td> <td style="text-align: right;">* 1011 60 92</td> <td style="text-align: right;">10</td> </tr> <tr> <td>white velvety, 2gang</td> <td style="text-align: right;">* 1012 60 92</td> <td style="text-align: right;">2</td> </tr> <tr> <td>white velvety, 3gang</td> <td style="text-align: right;">* 1013 60 92</td> <td style="text-align: right;">2</td> </tr> <tr> <td>white velvety, 4gang</td> <td style="text-align: right;">* 1014 60 92</td> <td style="text-align: right;">2</td> </tr> <tr> <td>white velvety, 5gang</td> <td style="text-align: right;">* 1015 60 92</td> <td style="text-align: right;">2</td> </tr> </table>	white velvety, 1gang	* 1011 60 92	10	white velvety, 2gang	* 1012 60 92	2	white velvety, 3gang	* 1013 60 92	2	white velvety, 4gang	* 1014 60 92	2	white velvety, 5gang	* 1015 60 92	2	<p>i 479</p> <p>Order no.</p> <p>Page</p> <p>page 223</p>
white velvety, 1gang	* 1011 60 92	10															
white velvety, 2gang	* 1012 60 92	2															
white velvety, 3gang	* 1013 60 92	2															
white velvety, 4gang	* 1014 60 92	2															
white velvety, 5gang	* 1015 60 92	2															

<p></p> 	<p>Frame</p> <p>– for vertical and horizontal mounting</p> <p>Suitable for optional Sealings IP44</p> <p>Order no. PU</p> <table border="0"> <tr> <td>polar white velvety, 1gang</td> <td style="text-align: right;">1011 60 99</td> <td style="text-align: right;">10</td> </tr> <tr> <td>polar white velvety, 2gang</td> <td style="text-align: right;">1012 60 99</td> <td style="text-align: right;">2</td> </tr> <tr> <td>polar white velvety, 3gang</td> <td style="text-align: right;">1013 60 99</td> <td style="text-align: right;">2</td> </tr> <tr> <td>polar white velvety, 4gang</td> <td style="text-align: right;">1014 60 99</td> <td style="text-align: right;">2</td> </tr> <tr> <td>polar white velvety, 5gang</td> <td style="text-align: right;">1015 60 99</td> <td style="text-align: right;">2</td> </tr> </table>	polar white velvety, 1gang	1011 60 99	10	polar white velvety, 2gang	1012 60 99	2	polar white velvety, 3gang	1013 60 99	2	polar white velvety, 4gang	1014 60 99	2	polar white velvety, 5gang	1015 60 99	2	<p>i 479</p> <p>Order no.</p> <p>Page</p> <p>page 223</p>
polar white velvety, 1gang	1011 60 99	10															
polar white velvety, 2gang	1012 60 99	2															
polar white velvety, 3gang	1013 60 99	2															
polar white velvety, 4gang	1014 60 99	2															
polar white velvety, 5gang	1015 60 99	2															

<p></p> 	<p>Frame</p> <p>– for vertical and horizontal mounting</p> <p>Suitable for optional Sealings IP44</p> <p>Order no. PU</p> <table border="0"> <tr> <td>anthracite velvety, lacquered, 1gang</td> <td style="text-align: right;">1011 60 96</td> <td style="text-align: right;">10</td> </tr> <tr> <td>anthracite velvety, lacquered, 2gang</td> <td style="text-align: right;">1012 60 96</td> <td style="text-align: right;">2</td> </tr> <tr> <td>anthracite velvety, lacquered, 3gang</td> <td style="text-align: right;">1013 60 96</td> <td style="text-align: right;">2</td> </tr> <tr> <td>anthracite velvety, lacquered, 4gang</td> <td style="text-align: right;">1014 60 96</td> <td style="text-align: right;">2</td> </tr> <tr> <td>anthracite velvety, lacquered, 5gang</td> <td style="text-align: right;">1015 60 96</td> <td style="text-align: right;">2</td> </tr> </table>	anthracite velvety, lacquered, 1gang	1011 60 96	10	anthracite velvety, lacquered, 2gang	1012 60 96	2	anthracite velvety, lacquered, 3gang	1013 60 96	2	anthracite velvety, lacquered, 4gang	1014 60 96	2	anthracite velvety, lacquered, 5gang	1015 60 96	2	<p>i 479</p> <p>Order no.</p> <p>Page</p> <p>page 223</p>
anthracite velvety, lacquered, 1gang	1011 60 96	10															
anthracite velvety, lacquered, 2gang	1012 60 96	2															
anthracite velvety, lacquered, 3gang	1013 60 96	2															
anthracite velvety, lacquered, 4gang	1014 60 96	2															
anthracite velvety, lacquered, 5gang	1015 60 96	2															

<p>New</p> 	<p>Frame</p> <p>- labelling field</p> <p></p> <p>For inserts with order no. 4522, 4523, 4593, 4594, mounting of the labelling field on the supporting ring is not possible. For this, the labelling field can be engaged in the recess of the frame.</p> <p>When the frame has been dismantled, the labelling field remains on the insert.</p> <p>Order no. PU</p> <table border="0"> <tr> <td>1gang</td> <td style="text-align: right;">* 1051 60 92</td> <td style="text-align: right;">10</td> </tr> <tr> <td>2gang horizontal</td> <td style="text-align: right;">* 1022 60 92</td> <td style="text-align: right;">10</td> </tr> <tr> <td>2gang vertical</td> <td style="text-align: right;">* 1052 60 92</td> <td style="text-align: right;">10</td> </tr> <tr> <td>3gang horizontal</td> <td style="text-align: right;">* 1023 60 92</td> <td style="text-align: right;">10</td> </tr> <tr> <td>3gang vertical</td> <td style="text-align: right;">* 1053 60 92</td> <td style="text-align: right;">10</td> </tr> </table>	1gang	* 1051 60 92	10	2gang horizontal	* 1022 60 92	10	2gang vertical	* 1052 60 92	10	3gang horizontal	* 1023 60 92	10	3gang vertical	* 1053 60 92	10	<p>– also suitable for cable ducts</p>
1gang	* 1051 60 92	10															
2gang horizontal	* 1022 60 92	10															
2gang vertical	* 1052 60 92	10															
3gang horizontal	* 1023 60 92	10															
3gang vertical	* 1053 60 92	10															



Frame

- labelling field

– also suitable for cable ducts



For inserts with order no. 4522, 4523, 4593, 4594, mounting of the labelling field on the supporting ring is not possible.

For this, the labelling field can be engaged in the recess of the frame.

When the frame has been dismantled, the labelling field remains on the insert.

Design	Order no.	PU
polar white velvety, 1gang	1051 60 99	10
polar white velvety, 2gang horizontal	1022 60 99	10
polar white velvety, 2gang vertical	1052 60 99	10
polar white velvety, 3gang horizontal	1023 60 99	10
polar white velvety, 3gang vertical	1053 60 99	10

Frames with large cut-out



Frame with large cut-out

i 479

Not suitable for surface-mounted housing.

– for vertical mounting

Design	Order no.	PU
white velvety	★ 1309 60 92	2



Frame with large cut-out

i 479

Not suitable for surface-mounted frames.

– for vertical mounting

Design	Order no.	PU
polar white velvety	1309 60 99	2



Frame with large cut-out

i 479

Not suitable for surface-mounted frames.

– for vertical mounting

Design	Order no.	PU
anthracite velvety, lacquered	1309 60 96	2